


TGS



CAB VARIANTS

	NN: COMPACT, DAY CAB HEIGHT	TN: COMPACT, LOW ROOF HEIGHT	TM: COMPACT, MEDIUM-HIGH HEIGHT
EXTERNAL LENGTH (mm)	1,880	2,280	2,280
EXTERNAL WIDTH (mm)	2,240	2,240	2,240
INTERIOR LENGTH (mm)	1,770	2,145	2,145
INTERIOR WIDTH (mm)	2,070	2,070	2,070
ENGINE TUNNEL HEIGHT (mm)	280	280	280
STANDING HEIGHT IN FRONT OF THE CO-DRIVER'S SEAT (mm)	1,645	1,650	1,930
HEIGHT ABOVE ENGINE TUNNEL (mm)	1,410	1,410	1,690
SLEEPER MEASUREMENTS (W×L) (mm)	-	800 × 1,960	800 × 1,960
BUNK CAPACITY	-	1	(max.) 2
SEATING CAPACITY	2 (max.3)	2	2

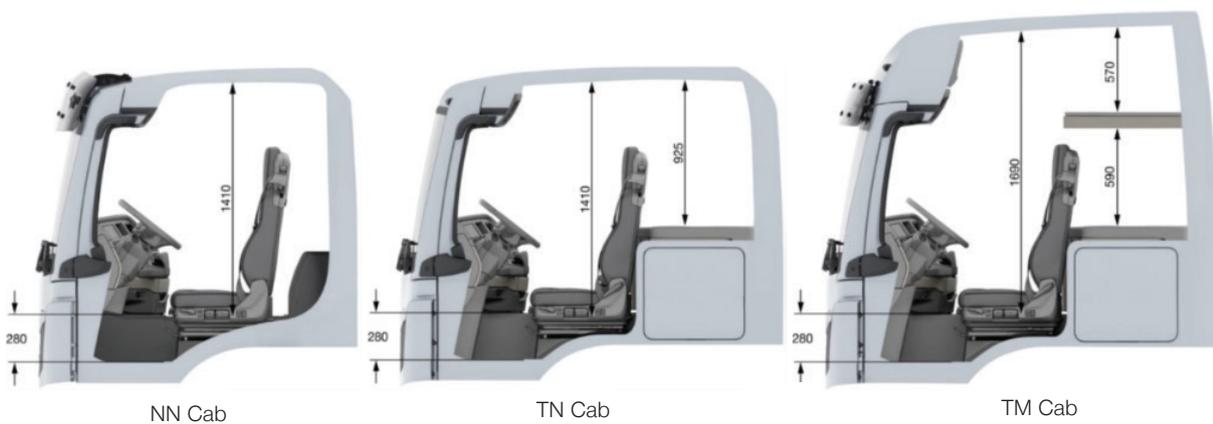

- Optional
- ✓ Standard
- N/A



CAB EXTERIOR

	FLEET	PREMIUM
FRAME, PAINT - GRAPHITE BLACK - RAL 9011	✓	✓
EXTERNAL CAB, PAINT - TRAFFIC WHITE - RAL 9016	✓	✓
FRONT BUMPER, SIDE TRIMS - MUDGUARD - TEXTURED COATING	✓	✓
STEEL - 3-PIECE BUMPER ASSEMBLY	•	• ¹
WHEEL RIMS TYPE - 22.5"	Steel	Alcoa LvL ONE®
CAB TILT MECHANISM - 1 BUTTON - ELECTRIC-ACTUATED HYDRAULIC ARM	✓	✓
LIFTING/TILT ROOF HATCH - MANUAL; STEEL	-	✓
WIPER ACTIVATION, AUTOMATIC, WITH RAIN SENSOR (AUTOMATIC WIPERS)	- (manual)	✓
LED LIGHTING - FRONT HEADLIGHTS, DIP & HIGH BEAM & DAYTIME RUNNING LIGHTS, FOG LIGHTS, CORNERING LIGHT, INDICATOR TURN SIGNALS, REAR TAILLIGHTS	- (halogen)	✓
ASSISTED HIGH-BEAM HEADLIGHT AUTO-DIP FUNCTION	-	✓
DRIVING-LIGHT CONTROL, AUTOMATIC WITH LIGHT SENSOR	- (manual)	✓
EXTERIOR REAR-VIEW MIRROR ELECTRIC, MAIN & SPOTTER WITH MANOEUVRING AID, HEATED	•	✓
KERB MIRROR LH, ELECTRIC & HEATED, FRONT LH CONVEX SPOTTER MIRROR, ADJUSTABLE	✓	✓

¹ standard on TGS 6x4 26.xxx BL SA high clearance



CAB INTERIOR

	FLEET	PREMIUM
MULTI-FUNCTION STEERING WHEEL, TILT AND TELESCOPIC WITH 0° PARK POSITION	✓	✓
INSTRUMENT CLUSTER, ANALOG DIALS WITH 5" CENTRE DIGITAL INFO SCREEN	✓	✓
COMFORT DRIVER'S SEAT, AIR-SPRUNG, WITH LUMBAR SUPPORT AND SHOULDER ADJUSTMENT	✓	✓
DRIVER'S SEAT HEATING - DUAL LEVEL	•	✓
CO-DRIVER'S SEAT, NOT SPRUNG, STATIC, WITH STORAGE BOX	✓	✓
AIR-CONDITIONING SYSTEM, AUTOMATIC - CLIMATRONIC	-	✓
AIR-CONDITIONING SYSTEM, MANUAL - 7-BUTTON	✓	-
MAN INFOTAINMENT MEDIA SYSTEM - 7" SCREEN WITH BLUETOOTH® MUSIC STREAMING AND BASIC HANDS-FREE FUNCTIONALITY	✓	✓
MAN ADVANCED 6-SPEAKER SOUND SYSTEM	• (4-speaker)	✓
COOLBOX, CENTRE AREA, TO REAR	• (storage box)	✓
MAN CONTROL PANEL EASYCONTROL, OPERABLE FROM OUTSIDE WITH DOOR OPEN	-	✓
WINDSCREEN ROLLER BLIND - INTERNAL - MANUAL PULL-DOWN	✓	✓

- Optional
- ✓ Standard
- N/A





WHEELBASE OPTIONS

CONFIGURATION	TRACTOR	RIGID
4 × 2	• 3,600 • 3,900	• 3,600 • 3,900 • 4,200 • 4,500 • 4,800 • 5,100 • 5,500 • 5,900 • 6,300 • 6,700
6 × 4	• 3,200 • 3,300 • 3,600 • 3,900	• 3,900 • 4,800 • 4,200 • 4,500 • 5,100
8 × 4	–	• 3,505

All measurements in mm – Euro WB – NZ 6x4 + 675 mm, NZ 8x4 + 2,470 mm



ENGINE & PERFORMANCE DATA

ENGINE SERIES	CYLINDER, DESIGN	DISPLACEMENT [LITRE]	PERFORMANCE [HP (KW)]	MAX TORQUE (NM)	EURO 6
D2676	6, in-line	12.4	510 (375)	2,600	✓
			480 (353)	2,450	
			440 (324)	2,250	
D1556		9.0	400 (294)	1,800	
			360 (265)	1,700	
			330 (243)	1,600	



DRIVETRAIN

GEARBOX	FRONT AXLE OPTIONS	REAR AXLE OPTIONS	AXLE RATIO OPTIONS
✓ Tipmatic 12-speed OD • Manual 12-speed OD	✓ Dropped • Straight	✓ Hypoid • Planetary	✓ 3.08 • 3.36 • 3.70



CHASSIS

SUSPENSION FRONT OPTIONS	SUSPENSION REAR OPTIONS	TYRES OPTIONS	
✓ Parabolic Leaf with stabilizer bar • Airbag ECAS	✓ Airbag ECAS • Parabolic multi-Leaf with stabilizer bar	Front (Steer)	Rear (Drive)
		275/70R22.5	275/70R22.5
		385/55R22.5	295/80R22.5
		385/65R22.5	11R22.5



FACTORY WARRANTY

ON-HIGHWAY APPLICATIONS	FLEET	PREMIUM
36 MONTHS / 450,000 KM ENTIRE VEHICLE	✓	✓
COMPETITIVE REPAIR AND MAINTENANCE SERVICE CONTRACT OPTIONS	•	•
VARIOUS EXTENDED WARRANTY OPTIONS	•	•

- Optional
- ✓ Standard
- N/A





GVM & GCM

	CONFIGURATION	TRACTOR	RIGID
GROSS VEHICLE MASS (GVM) – MAXIMUM	4 × 2	12,000 kg – 18,000 kg	
	6 × 4	26,000 kg	26,000 kg
	8 × 4	35,000 kg	35,000 kg
GROSS COMBINATION MASS (GCM) – MAXIMUM	4 × 2	• 46,000 kg – 66,000 kg	
	6 × 4	• 46,000 kg – 66,000 kg	
	8 × 4	• 46,000 kg – 66,000 kg	

•Dependent on horsepower rating



SAFETY FEATURES





	FLEET	PREMIUM
LANE GUARD SYSTEM (LGS)	✓	✓
LANE CHANGE SUPPORT (LCS) & TURN ASSIST	–	✓
ADVANCED EMERGENCY BRAKE ASSIST (EBA)	✓	✓
EMERGENCY BRAKING SIGNAL (ESS)	✓	✓
ADAPTIVE CRUISE CONTROL (ACC)	–	✓
CRUISE CONTROL (CC)	✓	–
ELECTRONIC BRAKE SYSTEM (EBS)	✓	✓
ANTI-LOCK BRAKING SYSTEM (ABS)	✓	✓
ANTI-SLIP CONTROL (ASR)	✓	✓
ELECTRONIC STABILITY PROGRAM (ESP)	✓	✓
ACOUSTIC REVERSING WARNING SYSTEM – 73 DB	✓	✓
DRIVER'S AIRBAG WITH SEATBELT PRE-TENSIONER (SRS)	✓	✓

- Optional
- ✓ Standard
- N/A





CHASSIS DIMENSIONS AND WEIGHTS

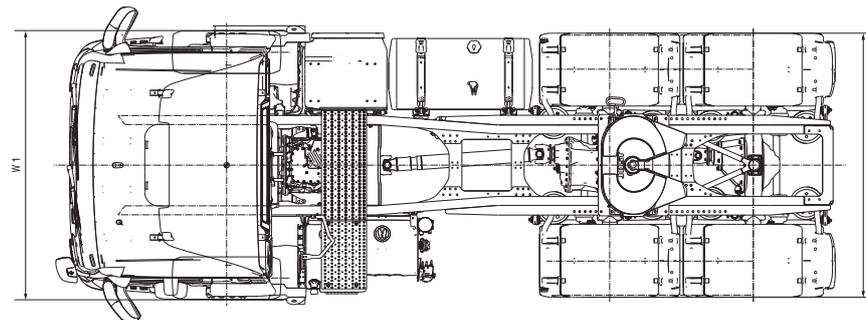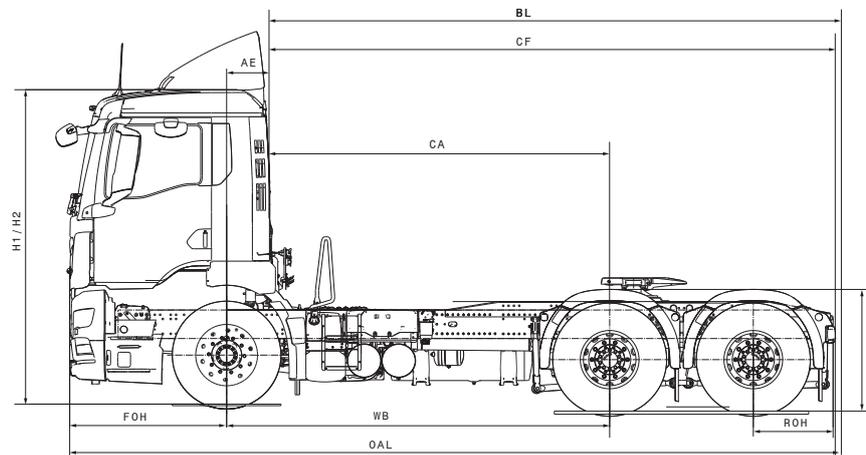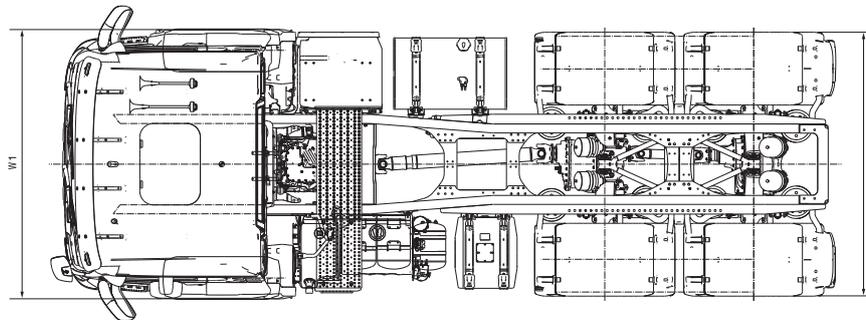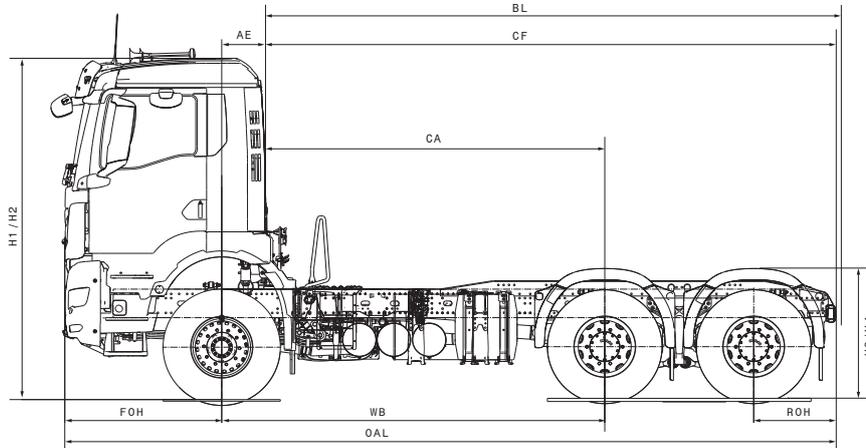

- Optional
- ✓ Standard
- N/A

Illustration shows TGS 26.xxx 6x4 HC 3600 BL CH NN vs TGS 26.xxx 6x4 3600 BL SA NN





CHASSIS DIMENSIONS AND WEIGHTS

CONFIGURATION	WHEELBASE (mm)	NZ WB (MM)	NN: COMPACT, DAY CAB			TN: COMPACT, LOW ROOF			TM: COMPACT, MEDIUM-HIGH			TURNING RADIUS	
			CAB WEIGHTS										
			Front (kg)	Rear (kg)	Total (kg)	Front (kg)	Rear (kg)	Total (kg)	Front (kg)	Rear (kg)	Total (kg)	Kerb to Kerb (m)	Wall to Wall (m)
8 × 4	3,505	5,975	6,860	2,866	9,726	6,943	2,886	9,829	6,959	2,882	9,841	20.9	22.7
6 × 4	3,600	4,275	4,828	3,460	8,288	4,998	3,476	8,474	5,308	3,556	8,864	17.6	19.3
6 × 4	5,100	5,775	5,738	3,844	9,582	5,747	3,908	9,665	5,765	3,991	9,676	21.7	23.4

NN CABIN: CHASSIS DIMENSIONS							EMPTY (mm)	LOADED (mm)	EMPTY (mm)	LOADED (mm)		
Wheelbase (mm)	NZ WB (mm)	FOH	NZ ROH	OAL	CA	CF	H1	H2	H3	H4	W1	W2
3,505	5,975	1,475	1,600	9,050	-	7,110	3,626	3,562	959	929	2,500	2,240
3,600	4,275	1,475	1,425	7,175	3,089	5,064	3,626	3,562	959	929	2,500	2,240
5,100	5,775	1,475	3,475	10,725	-	8,146	3,626	3,562	959	929	2,500	2,240

TN CABIN: CHASSIS DIMENSIONS							EMPTY (mm)	LOADED (mm)	EMPTY (mm)	LOADED (mm)		
Wheelbase (mm)	NZ WB (mm)	FOH	NZ ROH	OAL	CA	CF	H1	H2	H3	H4	W1	W2
3,505	5,975	1,475	1,600	9,050	-	6,710	3,626	3,562	959	929	2,500	2,240
3,600	4,275	1,475	1,425	7,175	2,721	4,617	3,626	3,562	959	929	2,500	2,240
5,100	5,775	1,475	3,475	10,725	-	8,146	3,626	3,562	959	929	2,500	2,240

TM CABIN: CHASSIS DIMENSIONS							EMPTY (mm)	LOADED (mm)	EMPTY (mm)	LOADED (mm)		
Wheelbase (mm)	NZ WB (mm)	FOH	NZ ROH	OAL	CA	CF	H1	H2	H3	H4	W1	W2
3,505	5,975	1,475	1,600	9,050	-	6,710	3,953	3,890	959	929	2,500	2,240
3,600	4,275	1,475	1,425	7,175	2,721	4,617	3,953	3,890	959	929	2,500	2,240
5,100	5,775	1,475	3,475	10,725	-	8,146	3,953	3,890	959	929	2,500	2,240

¹ Euro (3,505 mm) WB only for NZ 8x4 (5,975 mm)

All above weights and dimensions are subject to confirmation and may vary depending on final specification.
Manufacturing tolerances ± 3%

All information and specifications are correct at the time of printing. Information and specifications are subject to change without notice.
Some images are for illustrative purposes only and may not reflect the local product. For current information, please consult your MAN sales professional.

- Optional
- ✓ Standard
- N/A

